

Model: 2004 Scona 16 L oboy

General Description

Length: 16 Wheel 60 T on Scissor neck L oboy
Approx 53'
Width: 10' 6"

Mainframe Specifications

Main Flanges: High Tensile Steel
Main Web: High Tensile Steel
Crossmembers: Steel I Beam on 20 inch centers

Running Gear Specifications

Suspension: 16 Wheel Rubber Bushed Walking Beam
Axles: D22 35" Track
Hub & Drums: 5 spoke dayton
Brake Pots: Service
Slacks: Manual
Cams: 10 Spline S cam
Brake Lining: 16 1/2 x 7
Wheels: 22.5 x 8.25 Dayton Style
Tires: 275 / 70R22.5 Michelin XTY

Features

Pick-Up Throat: Full width p/u throat, Scissor assm to pin in 2 positions
Jeep Ext. Full width jeep extension c/w rollers for T/A & 16 wheel jeep
King Pin: 2 inch removable on 18 inch settings
Coupler Height: 54" or as required
CentreRoll: 7" non ratchet
Dolly Legs: Fold Down
Rear Roll: 10" Rear Roll
Pin Pockets: 7 standard/ side, mounted outside webb in flange
Tie Downs: At each cross member where possible & under each outrigger
Floor: 3 inch rough fir decking including goose neck
Suspension Area: Open
Wheel Area: Wheel area open
Add. Option: Pin Style Booster Hook Up

System Specification

Air System: Regulation MVSS System with Service brakes
Electrical: Regulation with sealed beam rubber mounted lights throughout, swing out wide load lights, and 4 prong long load light receptable on rear.


Finish

Paint: Sandblasted, primed and painted with Endura plastic paint, and conspicuity tape


Camex Equipment Sales & Rental Inc.

1301-4th Street, Nisku, Alberta Tel: (780) 955-2770 Fax: (780) 955-3735 Toll Free: 1-877-955-2770
info@camex.ca www.camex.ca

GROUND ELEVATION

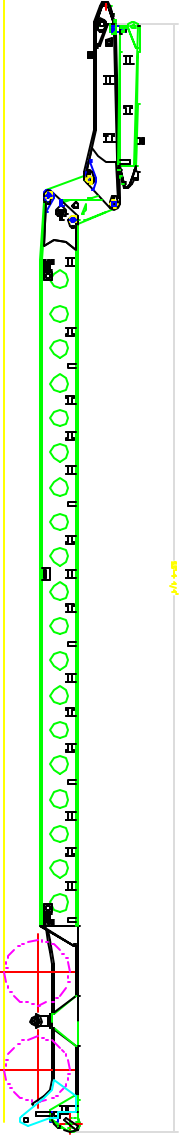

GROUND ELEVATION

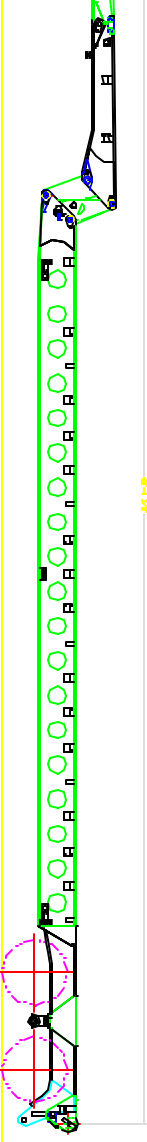

GROUND ELEVATION

